



XYmatic
trimplus

MAINFEATURES

- LCD Touch Screen display with intuitive and easy-to-use software
- Auto-alignment
- Sensor to read cross-marks
- Adjustable speed X & Y axis
- Excellent cutting area visibility
- Pneumatic Pinch Roll with silent compressor inside the machine
- Automatic waste collecting system
- Plug & Play

- Up to 10 pneumatic vertical cutting units
- Double load reel
- Tower Light
- New alignment system of vertical cutting units
- Open cutting units (no paper jam)
- Monolithic machine structure
- Standard loading jumbo Roll max diameter 400mm
- Up to 20 customizable memories

OPTIONAL

- Single cutting unit (max 10)
- Central twin cutting unit
- Laser ray for vertical cut
- Table for copies collection


MATERIALS

- Paper (laminated or encapsulated)
- Wallpaper
- Canvas & Polyester (with liner)
- Reflective material
- PVC banner
- Vinyl & Vinyl sticker
- Display backlit & frontlit
- Magnetic rubber
- Polycarbonate in film

Intuitive and easy-to-use software



Innovative automatic cutting unit




Laser ray for vertical cut (optional)



Tower Light



LCD Touch Screen Display

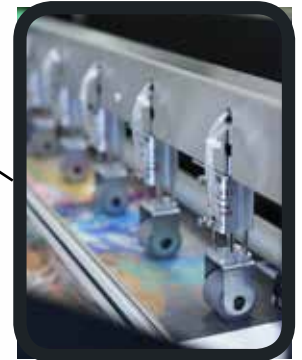

Pneumatic Pinch Roll



Silent compressor inside the machine



Double central cutting units (optional)



Pneumatic vertical cutting units




Table for copies collection (optional)

	XY MATIC TRIM PLUS
Szerokość	1650 mm
Cutting thickness	
X AXIS	1,2 mm max
Y AXIS	0,5 mm max
Speed Advancement	1-50 m/minute
Cutting unit max	10 vertical unit
Horizontal cutting speed	1-150 m/minute
Power supply	230V - 50Hz - 650W



PRINTER 4 Spółka Jawna
ul. Ojcowska 2b
31-344 Kraków

Kontakt:
tel: 12 296 40 25
tel: 535 444 845

e-mail: biuro@neolt.pl